



The bridge to possible

[Data sheet](#)
Cisco public

Cisco Catalyst 9115AX Series Wi-Fi 6 Access Points

Contents

Resilient - steady performance in demanding environments	5
Secure infrastructure	5
Intelligence for proactive insights and analytics	6
Aesthetically redesigned for next-generation enterprise	6
Cisco DNA support	6
Product specifications	7
Licensing and software packaging	29
Managing licenses with Smart Accounts	30
Warranty information	32
Cisco environmental sustainability	32
Cisco Services	33
Cisco Capital	33

The Cisco® Catalyst® 9115AX Series with Wi-Fi 6 is the next generation of enterprise access points. They are resilient, secure, and intelligent.



Figure 1.
Cisco Catalyst 9115AX Series

Hyperconnectivity with steady performance in demanding environments. Exponential growth of Internet of Things (IoT) devices and next-generation applications. Advanced persistent security threats. All of these require a wireless network that provides resiliency and superior connectivity, integrated security with advanced classification and containment, and hardware and software innovations to automate, secure, and simplify networks. Updating your wireless infrastructure to one that will meet these needs is paramount for today's digital business. The new generation of Cisco Catalyst 9100 Access Points, with high-performance Wi-Fi 6 (802.11ax) capabilities and innovations in RF performance, security, and analytics, enables end-to-end digitization and helps accelerate the rollout of business services by delivering beyond Wi-Fi.

The Cisco Catalyst 9115AX Series Access Points are enterprise-class products that will address your current and future needs. They are the first step to updating your network to take better example of all of the features and benefits that Wi-Fi 6 provides.

Key features:

- Wi-Fi 6 certifiable
- Three radios: 2.4 GHz (4x4), 5 GHz (4x4), and BLE
- OFDMA and MU-MIMO
- Multigigabit support
- Internal or external antenna
- Available with optional embedded wireless controller

The Cisco Catalyst 9115AX Series Access Points support both Orthogonal Frequency-Division Multiple Access (OFDMA) and Multiuser Multiple Input, Multiple Output (MU-MIMO), delivering more predictable performance for advanced applications and IoT. Additionally, with up to 2.5 Gbps with NBASE-T and IEEE 802.3bz Ethernet compatibility, the Cisco Catalyst 9115AX Series can seamlessly offload network traffic without any bottlenecks. With Cisco's Multigigabit technology, you can use your existing Category 5e or 6 cabling to achieve speeds up to 5 Gbps, allowing for higher throughputs with minimum cost. And with two different antenna choices, you're able to decide which option works best for you.

With the 9115AX Series, you can secure remote workers or the micro-office. Any Cisco Aironet or Catalyst access point can function as an OfficeExtend access point (OEAP). With an OEAP, an employee at home or in a temporary micro-office will have access to the corporate SSID and the corporate network without the need to set up a VPN or have any advanced technical know-how.

Cisco User Defined Network, a feature available in Cisco DNA Center, allows IT to give end users control of their very own wireless network partition on a shared network. End users can then remotely and securely deploy their devices on this network. Perfect for university dormitories or extended hospital stays, Cisco User Defined Network grants both device security and control, allowing each user to choose who can connect to their network. (Available second half of calendar year 2020.)

The Wi-Fi 6 readiness dashboard is a new dashboard in the Assurance menu of Cisco DNA Center. It will look through the inventory of all devices on the network and verify device, software, and client compatibility with the new Wi-Fi 6 standard. After upgrading, advanced wireless analytics will indicate performance and capacity gains as a result of the Wi-Fi 6 deployment. This is an incredible tool that will help your team define where and how the wireless network should be upgraded. It will also give you insights into the access point distribution by protocol (802.11 ac/n/abg), wireless airtime efficiency by protocol, and granular performance metrics.

Table 1. Features and benefits

Feature	Benefits
802.11ax (Wi-Fi 6)	The IEEE 802.11ax emerging standard, also known as High-Efficiency-Wireless (HEW) or Wi-Fi 6, builds on 802.11ac. It will deliver a better experience in typical environments and more predictable performance for advanced applications such as 4K or 8K video, high-density, high-definition collaboration apps, all-wireless offices, and IoT. 802.11ax is designed to use both the 2.4-GHz and 5-GHz bands, unlike the 802.11ac standard.
Uplink/downlink OFDMA	OFDMA-based scheduling splits the bandwidth into smaller chunks called Resource Units (RUs), which can be allocated to individual clients in both the downlink and uplink directions to reduce overhead and latency.
MU-MIMO technology	Supporting four spatial streams, MU-MIMO enables access points to split spatial streams between client devices, to maximize throughput.
BSS coloring	Spatial reuse (also known as Basic Service Set [BSS] coloring) allows the Access Points (APs) and their clients to differentiate between BSSs, thus permitting more simultaneous transmissions.
Target wake time	A new power savings mode called Target Wake Time (TWT) allows the client to stay asleep and to wake up only at prescheduled (target) times to exchange data with the AP. This offers significant energy savings for battery-operated devices, up to 3x to 4x compared to 802.11n and 802.11ac.
Cisco Embedded Wireless Controller	The 9115AX Wi-Fi 6 access points are available with a built-in controller. The Cisco Embedded Wireless Controller on Catalyst 9100 Access Points provides an easy-to-deploy and manage option that does not require a physical appliance. The control resides on the access point, so there is no added footprint or complexity. And because it uses Cisco Catalyst 9800 Series code, it's easy to migrate your network as your needs grow.
Multigigabit Ethernet support	Provides uplink speeds of 2.5 Gbps, in addition to 100 Mbps and 1 Gbps. All speeds are supported on Category 5e cabling for an industry first, as well as 10GBASE-T (IEEE 802.3bz) cabling.

Feature	Benefits
Bluetooth 5.0	Integrated Bluetooth Low Energy (BLE) 5.0 radio to enable IoT use cases such as location tracking and wayfinding.
Apple features	<p>Apple and Cisco have partnered to create an optimal mobile experience for iOS devices on corporate networks based on Cisco technologies. Using new features in iOS 10, in combination with the latest software and hardware from Cisco, businesses can now more effectively use their network infrastructure to deliver an enhanced user experience across all business applications.</p> <p>At the center of the collaboration is a unique handshake between the Cisco WLAN and Apple devices. This handshake enables the Cisco WLAN to provide an optimal Wi-Fi roaming experience to Apple devices. Additionally, the Cisco WLAN trusts Apple devices and gives priority treatment for business-critical applications specified by the Apple device. This feature is also known as Fast Lane.</p>

Note: Features available in future releases – Uplink/downlink OFDMA, Cisco Intelligent Capture

Resilient - steady performance in demanding environments

Network infrastructure that upgrades to Wi-Fi 6, also known as 802.11ax, enables devices to get up to a 4x capacity boost to support the additional devices connected to the network as well as the data they generate. 802.11ax will offer Multigigabit performance, with seamless connectivity and higher throughput compared to the 802.11ac standard. This means you'll see your network run more smoothly. With support for BSS coloring, the new standard eases high-density environments allowing simultaneous transmissions, ultimately increasing network capacity, customer interactions, and value-add services.

Wi-Fi 6, with better coordination of transit time to and from devices, will also bring about a reduction in latency and a greater reliability, allowing for hundreds of devices per access point. This allows for IoT devices to be reliably deployed at scale. And an overall improved user experience will be seen as well, as 802.11ax will improve the battery life of devices such as smartphones, tablets, and IoT devices when compared to prior standards. For more details about 802.11ax, [please check Cisco's technical white paper](#) on 802.11ax.

Secure infrastructure

Trustworthy systems built with Cisco Trust Anchor Technologies provide a highly secure foundation for Cisco products. With the Cisco Catalyst 9100 Access Points, these technologies enable hardware and software authenticity assurance for supply chain trust and strong mitigation against man-in-the-middle attacks that compromise software and firmware. Trust Anchor capabilities include:

- **Image signing:** Cryptographically signed images provide assurance that the firmware, BIOS, and other software are authentic and unmodified. As the system boots, the system's software signatures are checked for integrity.
- **Secure Boot:** Cisco Secure Boot technology anchors the boot sequence chain of trust to immutable hardware, mitigating threats against a system's foundational state and the software that is to be loaded, regardless of a user's privilege level. It provides layered protection against the persistence of illicitly modified firmware.
- **Cisco Trust Anchor module:** A tamper-resistant, strong cryptographic, single-chip solution provides hardware authenticity assurance to uniquely identify the product so that its origin can be confirmed to Cisco. This provides assurance that the product is genuine.

Intelligence for proactive insights and analytics

With multi-RF support paramount for IoT devices and expanded ecosystem partnerships, the Cisco Catalyst 9100 portfolio provides unprecedented visibility from mobile devices on Cisco networks. Enabling digitization with Cisco DNA, the Cisco Catalyst 9100 portfolio offers further Cisco RF innovations for securing air with real-time telemetry, guided remediation, and optimization for Wi-Fi and IoT networks. The Cisco Catalyst 9100 Access Points can support advanced spectrum intelligence, device analytics, and network assurance. With capabilities such as Intelligent Capture, these devices probe the network and provide Cisco DNA Center with deep analysis. The software can track numerous anomalies and instantaneously review all packets on demand, emulating the onsite network administrator. Overall, Cisco Intelligent Capture allows for more informed decisions on your wireless networks.

Aesthetically redesigned for next-generation enterprise

The Cisco Catalyst 9100 Access Points are built from the ground up, with a new aerodynamic look and smooth finish, integrating RF excellence and next-generation technologies to provide a best-in-class wireless experience without compromise. While packing several high-performance features, the hardware is redesigned to deliver higher efficiencies in a more compact form factor to make visually appealing Wi-Fi deployments commonplace.

Cisco DNA support

Pairing the Cisco Catalyst 9115AX Series Access Points with Cisco DNA allows for a total network transformation. Cisco DNA allows you to truly understand your network with real-time analytics, quickly detect and contain security threats, and easily provide networkwide consistency through automation and virtualization.

Cisco DNA with Software-Defined Access (SD-Access) is the network fabric that powers business. It is an open and extensible, software-driven architecture that accelerates and simplifies your enterprise network operations. The programmable architecture frees your IT staff from time-consuming, repetitive network configuration tasks so they can focus instead on innovation that positively transforms your business. By decoupling network functions from the hardware, you can build and manage your entire wired and wireless network from a single user interface. SD-Access enables policy-based automation from edge to cloud with foundational capabilities. These include:

- Simplified device deployment
- Unified management of wired and wireless networks
- Network virtualization and segmentation
- Group-based policies
- Context-based analytics

The Cisco Catalyst 9115AX Series Access Points support Software-Defined Access, Cisco’s leading enterprise architecture.

- Working together, the Cisco Catalyst 9115AX Series and Cisco DNA offer such features as:
- Cisco DNA Spaces
- Cisco Identity Services Engine
- Cisco DNA Analytics and Assurance
- And much more

The result? Your network stays relevant, becomes digital ready, and is the lifeblood of your organization.

Product specifications

Table 2. Specifications

Item	Specification
Part numbers	<p>Cisco Catalyst 9115AXI Access Point: Indoor environments, with internal antennas</p> <ul style="list-style-type: none"> • C9115AXI-x: Cisco Catalyst 9115 Series <p>Cisco Catalyst 9115AXE Access Point: Indoor, challenging environments, with external antennas</p> <ul style="list-style-type: none"> • C9115AXE-x: Cisco Catalyst 9115 Series <p>Cisco Catalyst 9115AXI Access Point: Indoor environments, with internal antennas, with embedded wireless controller</p> <ul style="list-style-type: none"> • C9115AXI-EWC-x: Cisco Catalyst 9115 Series <p>Cisco Catalyst 9115AXE Access Point: Indoor, challenging environments, with external antennas, with embedded wireless controller</p> <ul style="list-style-type: none"> • C9115AXE-EWC-x: Cisco Catalyst 9115 Series <p>Regulatory domains: (x = regulatory domain)</p> <p>Customers are responsible for verifying approval for use in their individual countries. To verify approval and to identify the regulatory domain that corresponds to a particular country, visit https://www.cisco.com/go/aironet/compliance.</p> <p>Not all regulatory domains have been approved. As they are approved, the part numbers will be available on the Global Price List.</p> <p>Cisco Wireless LAN Services</p> <ul style="list-style-type: none"> • AS-WLAN-CNSLT: Cisco Wireless LAN Network Planning and Design Service • AS-WLAN-CNSLT: Cisco Wireless LAN 802.11n Migration Service • AS-WLAN-CNSLT: Cisco Wireless LAN Performance and Security Assessment Service
Software	<ul style="list-style-type: none"> • Cisco Unified Wireless Network Software Release 8.9 or later • Cisco IOS® XE Software Release 16.11 or later
Supported wireless LAN controllers	<ul style="list-style-type: none"> • Cisco Catalyst 9800 Series Wireless Controllers • Cisco 3500, 5520, and 8540 Series Wireless Controllers and Cisco Virtual Wireless Controller

Item	Specification
802.11n version 2.0 (and related) capabilities	<ul style="list-style-type: none"> • 4x4 MIMO with four spatial streams • Maximal Ratio Combining (MRC) • 802.11n and 802.11a/g beamforming • 20- and 40-MHz channels • PHY data rates up to 890 Mbps (40 MHz with 5 GHz and 20 MHz with 2.4 GHz) • Packet aggregation: A-MPDU (transmit and receive), A-MSDU (transmit and receive) • 802.11 Dynamic Frequency Selection (DFS) • Cyclic Shift Diversity (CSD) support
802.11ac	<ul style="list-style-type: none"> • 4x4 downlink MU-MIMO with four spatial streams • MRC • 802.11ac beamforming • 20-, 40-, 80-, and 160-MHz channels • PHY data rates up to 3.47 Gbps (160 MHz with 5 GHz) • Packet aggregation: A-MPDU (transmit and receive), A-MSDU (transmit and receive) • 802.11 DFS • CSD support
802.11ax	<ul style="list-style-type: none"> • 4x4 downlink MU-MIMO with four spatial streams • Uplink/downlink OFDMA • TWT • BSS coloring • MRC • 802.11ax beamforming • 20-, 40-, 80-, and 160-MHz channels • PHY data rates up to 5.38 Gbps (160 MHz with 5 GHz and 20 MHz with 2.4 GHz) • Packet aggregation: A-MPDU (transmit and receive), A-MSDU (transmit and receive) • 802.11 DFS • CSD support
Integrated antenna	<ul style="list-style-type: none"> • 2.4 GHz, peak gain 3 dBi, internal antenna, omnidirectional in azimuth • 5 GHz, peak gain 4 dBi, internal antenna, omnidirectional in azimuth
External antenna (sold separately)	<ul style="list-style-type: none"> • Cisco Catalyst 9115AXE Access Points are certified for use with antenna gains up to 6 dBi (2.4 GHz and 5 GHz) • Cisco offers the industry's broadest selection of antennas, delivering optimal coverage for a variety of deployment scenarios
Interfaces	<ul style="list-style-type: none"> • 1x 100, 1000, 2500 Multigigabit Ethernet (RJ-45) - IEEE 802.3bz • Management console port (RJ-45) • USB 2.0 (enabled via future software)
Indicators	<ul style="list-style-type: none"> • Status LED indicates boot loader status, association status, operating status, boot loader warnings, and boot loader errors
Dimensions (W x L x H)	<ul style="list-style-type: none"> • Access point (without mounting brackets): C9115AXI: 8.0 x 8.0 x 1.5 in. (20.3 x 20.3 x 3.8 cm), C9115AXE: 8.0 x 8.0 x 1.7 in. (20.3 x 20.3 x 4.3 cm)

Item	Specification																																										
Weight	<p>Cisco Catalyst 9115AXI</p> <ul style="list-style-type: none"> • 1.98 lb (0.9 kg) <p>Cisco Catalyst 9115AXE</p> <ul style="list-style-type: none"> • 2.43 lb (1.1 kg) 																																										
Input power requirements	<ul style="list-style-type: none"> • 802.3at Power over Ethernet Plus (PoE+), 802.3bt Cisco Universal PoE (Cisco UPOE+, Cisco UPOE®) • Cisco power injector, AIR-PWRINJ6= • 802.3af PoE • Cisco power injector, AIR-PWRINJ5= (Note: This injector supports only 802.3af) <p>Note: When 802.3af PoE is the source of power, both 2.4-GHz and 5-GHz radios will be reduced to 2x2 and Ethernet downgraded to 1 Gigabit Ethernet. In addition, the USB port will be off.</p>																																										
Power draw	<p>802.3at full feature – Catalyst 9115AXI</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #D9D9D9;"> <th>Power source</th> <th>Power type</th> <th>2.4-GHz radio</th> <th>5-GHz radio</th> <th>Link speed</th> <th>USB</th> <th>LLDP</th> </tr> </thead> <tbody> <tr> <td>802.3at</td> <td>PoE</td> <td>4x4</td> <td>4x4</td> <td>2.5G</td> <td>Y</td> <td>20.4W</td> </tr> </tbody> </table> <p>802.3at full feature – Catalyst 9115AXE</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #D9D9D9;"> <th>Power source</th> <th>Power type</th> <th>2.4-GHz radio</th> <th>5-GHz radio</th> <th>Link speed</th> <th>USB</th> <th>LLDP</th> </tr> </thead> <tbody> <tr> <td>802.3at</td> <td>PoE</td> <td>4x4</td> <td>4x4</td> <td>2.5G</td> <td>Y</td> <td>21.4W</td> </tr> </tbody> </table> <p>802.3af reduced feature</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #D9D9D9;"> <th>Power source</th> <th>Power type</th> <th>2.4-GHz radio</th> <th>5-GHz radio</th> <th>Link speed</th> <th>USB</th> <th>LLDP</th> </tr> </thead> <tbody> <tr> <td>802.3af</td> <td>PoE</td> <td>2x2</td> <td>2x2</td> <td>1G</td> <td>N</td> <td>13W</td> </tr> </tbody> </table>	Power source	Power type	2.4-GHz radio	5-GHz radio	Link speed	USB	LLDP	802.3at	PoE	4x4	4x4	2.5G	Y	20.4W	Power source	Power type	2.4-GHz radio	5-GHz radio	Link speed	USB	LLDP	802.3at	PoE	4x4	4x4	2.5G	Y	21.4W	Power source	Power type	2.4-GHz radio	5-GHz radio	Link speed	USB	LLDP	802.3af	PoE	2x2	2x2	1G	N	13W
Power source	Power type	2.4-GHz radio	5-GHz radio	Link speed	USB	LLDP																																					
802.3at	PoE	4x4	4x4	2.5G	Y	20.4W																																					
Power source	Power type	2.4-GHz radio	5-GHz radio	Link speed	USB	LLDP																																					
802.3at	PoE	4x4	4x4	2.5G	Y	21.4W																																					
Power source	Power type	2.4-GHz radio	5-GHz radio	Link speed	USB	LLDP																																					
802.3af	PoE	2x2	2x2	1G	N	13W																																					
Environmental	<p>Cisco Catalyst 9115AXI</p> <ul style="list-style-type: none"> • Nonoperating (storage) temperature: -22° to 158° F (-30° to 70° C) • Nonoperating (storage) altitude test: 25°C, 15,000 ft. • Operating temperature: 32° to 122° F (0° to 50° C) • Operating humidity: 10% to 90% (noncondensing) • Operating altitude test: 40°C, 9843 ft. <p>Note: When the ambient operating temperature exceeds 40° C, the access point will shift from 4x4 to 2x2 on both the 2.4-GHz and 5-GHz radios, uplink Ethernet will downgrade to 1 Gigabit Ethernet, and the USB interface will be disabled.</p> <p>Cisco Catalyst 9115AXE</p> <ul style="list-style-type: none"> • Nonoperating (storage) temperature: -22° to 158° F (-30° to 70° C) • Nonoperating (storage) altitude test: 25°C, 15,000 ft. • Operating temperature: -4° to 122° F (-20° to 50° C) • Operating humidity: 10% to 90% (noncondensing) • Operating altitude test: 40°C, 9843 ft. 																																										

Item	Specification	
System memory	<ul style="list-style-type: none"> • 2048 MB DRAM • 1024 MB flash 	
Warranty	Limited lifetime hardware warranty	
Available transmit power settings	2.4 GHz <ul style="list-style-type: none"> • 23 dBm (200 mW) • 20 dBm (100 mW) • 17 dBm (50 mW) • 14 dBm (25 mW) • 11 dBm (12.5 mW) • 8 dBm (6.25 mW) • 5 dBm (3.13 mW) • 2 dBm (1.56 mW) • -1dBm (0.79mW) • -4dBm (0.39mW) 	5 GHz <ul style="list-style-type: none"> • 23 dBm (200 mW) • 20 dBm (100 mW) • 17 dBm (50 mW) • 14 dBm (25 mW) • 11 dBm (12.5 mW) • 8 dBm (6.25 mW) • 5 dBm (3.13 mW) • 2 dBm (1.56 mW) • -1dBm (0.79mW) • -4dBm (0.39mW)
Frequency band and 20-MHz operating channels	A (A regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.700 GHz; 8 channels (excludes 5.600 to 5.640 GHz) • 5.745 to 5.825 GHz; 5 channels B (B regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.700 GHz; 11 channels • 5.745 to 5.865 GHz; 7 channels C (C regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.745 to 5.825 GHz; 5 channels D (D regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.180 to 5.320 GHz; 8 channels • 5.745 to 5.825 GHz; 5 channels E (E regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.700 GHz; 8 channels (excludes 5.600 to 5.640 GHz) F (F regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.250 to 5.350 GHz; 4 channels • 5.725 to 5.825 GHz; 4 channels G (G regulatory domain):	I (I regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.180 to 5.320 GHz; 8 channels K (K regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.620 GHz; 7 channels • 5.745 to 5.805 GHz; 4 channels N (N regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.180 to 5.320 GHz; 8 channels • 5.745 to 5.825 GHz; 5 channels Q (Q regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.700 GHz; 11 channels R (R regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.180 to 5.320 GHz; 8 channels • 5.660 to 5.825 GHz; 8 channels (excludes 5.700 to 5.745 GHz) S (S regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.700 GHz; 11 channels • 5.745 to 5.825 GHz; 5 channels T (T regulatory domain): <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels

Item	Specification
	<ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.745 to 5.865 GHz; 7 channels <p>H (H regulatory domain):</p> <ul style="list-style-type: none"> • 2.412 to 2.472 GHz; 13 channels • 5.180 to 5.320 GHz; 8 channels • 5.745 to 5.825 GHz; 5 channels
	<ul style="list-style-type: none"> • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.700 GHz; 12 channels • 5.745 to 5.825 GHz; 5 channels <p>Z (Z regulatory domain):</p> <ul style="list-style-type: none"> • 2.412 to 2.462 GHz; 11 channels • 5.180 to 5.320 GHz; 8 channels • 5.500 to 5.700 GHz; 8 channels (excludes 5.600 to 5.640 GHz) • 5.745 to 5.825 GHz; 5 channels

Note: Customers are responsible for verifying approval for use in their individual countries. To verify approval and to identify the regulatory domain that corresponds to a particular country, visit <https://www.cisco.com/go/aironet/compliance>

Maximum number of nonoverlapping channels	<p>2.4 GHz</p> <ul style="list-style-type: none"> • 802.11b/g: <ul style="list-style-type: none"> ◦ 20 MHz: 3 • 802.11n: <ul style="list-style-type: none"> ◦ 20 MHz: 3 • 802.11ax: <ul style="list-style-type: none"> ◦ 20MHz:3 	<p>5 GHz</p> <ul style="list-style-type: none"> • 802.11a: <ul style="list-style-type: none"> ◦ 20 MHz: 26 FCC, 16 EU • 802.11n: <ul style="list-style-type: none"> ◦ 20 MHz: 26 FCC, 16 EU ◦ 40 MHz: 12 FCC, 7 EU • 802.11ac/ax: <ul style="list-style-type: none"> ◦ 20 MHz: 26 FCC, 16 EU ◦ 40 MHz: 12 FCC, 7 EU ◦ 80 MHz: 5 FCC, 3 EU ◦ 160 MHz 2 FCC, 1 EU
--------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note: This varies by regulatory domain. Refer to the product documentation for specific details for each regulatory domain.

Compliance standards	<ul style="list-style-type: none"> • Safety: <ul style="list-style-type: none"> ◦ IEC 60950-1 ◦ EN 60950-1 ◦ UL 60950-1 ◦ CAN/CSA-C22.2 No. 60950-1 ◦ AS/NZS 60950-1 ◦ UL 2043 ◦ Class III equipment • Emissions: <ul style="list-style-type: none"> ◦ CISPR 32 (rev. 2015) ◦ EN 55032 (rev. 2012/AC:2013) ◦ EN 55032 (rev. 2015) ◦ EN61000-3-2 (rev. 2014) ◦ EN61000-3-3 (rev. 2013) ◦ KN61000-3-2 ◦ KN61000-3-3 ◦ AS/NZS CISPR 32 Class B (rev. 2015) ◦ 47 CFR FCC Part 15B ◦ ICES-003 (rev. 2016 Issue 6, Class B) ◦ VCCI (V3) ◦ CNS (rev. 13438) ◦ KN-32 ◦ TCVN 7189 (rev. 2009) • Immunity: <ul style="list-style-type: none"> ◦ CISPR 24 (rev. 2010) ◦ EN 55024/EN 55035 (rev. 2010)
-----------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Item	Specification
	<ul style="list-style-type: none"> • Emissions and immunity: <ul style="list-style-type: none"> ◦ EN 301 489-1 (v2.1.1 2017-02) ◦ EN 301 489-17 (v3.1.1 2017-02) ◦ QCVN (18:2014) ◦ KN 489-1 ◦ KN 489-17 ◦ EN 60601 (1-1:2015) • Radio: <ul style="list-style-type: none"> ◦ EN 300 328 (v2.1.1) ◦ EN 301 893 (v2.1.1) ◦ AS/NZS 4268 (rev. 2017) ◦ 47 CFR FCC Part 15C, 15.247, 15.407 ◦ RSP-100 ◦ RSS-GEN ◦ RSS-247 ◦ China regulations SRRC ◦ LP0002 (rev 2018.1.10) ◦ Japan Std. 33a, Std. 66, and Std. 71 • RF safety: <ul style="list-style-type: none"> ◦ EN 50385 (rev. Aug 2002) ◦ ARPANSA ◦ AS/NZS 2772 (rev. 2016) ◦ EN 62209-1 (rev. 2016) ◦ EN 62209-2 (rev. 2010) ◦ 47 CFR Part 1.1310 and 2.1091 ◦ RSS-102 • IEEE standards: <ul style="list-style-type: none"> ◦ IEEE 802.3 ◦ IEEE 802.3ab ◦ IEEE 802.3af/at ◦ IEEE 802.11 a/b/g/n/ac/ax ◦ IEEE 802.11h, 802.11d • Security: <ul style="list-style-type: none"> ◦ 802.11i, Wi-Fi Protected Access 3 (WPA3), WPA2, WPA ◦ 802.1X ◦ Advanced Encryption Standard (AES) • Extensible Authentication Protocol (EAP) types: <ul style="list-style-type: none"> ◦ EAP-Transport Layer Security (TLS) ◦ EAP-Tunneled TLS (TTLS) or Microsoft Challenge Handshake Authentication Protocol Version 2 (MSCHAPv2) ◦ Protected EAP (PEAP) v0 or EAP-MSCHAPv2 ◦ EAP-Flexible Authentication via Secure Tunneling (EAP-FAST) ◦ PEAP v1 or EAP-Generic Token Card (GTC) ◦ EAP-Subscriber Identity Module (SIM)
Data rates supported	802.11b: 1, 2, 5.5, and 11 Mbps
	802.11a/g: 6, 9, 12, 18, 24, 36, 48, and 54 Mbps
	802.11n data rates on 2.4 GHz (only 20 MHz and MCS 0 to MCS 31): and 5 GHz

Item	Specification				
	MCS Index ¹	GI ² = 800 ns	GI = 800 ns	GI = 400 ns	GI = 400 ns
		20-MHz rate (Mbps)	40-MHz rate (Mbps)	20-MHz rate (Mbps)	40-MHz rate (Mbps)
	0	6.5	13.5	7.2	15
	1	13	27	14.4	30
	2	19.5	40.5	21.7	45
	3	26	54	28.9	60
	4	39	81	43.3	90
	5	52	108	57.8	120
	6	58.5	121.5	65	135
	7	65	135	72.2	150
	8	13	27	14.4	30
	9	26	54	28.9	60
	10	39	81	43.3	90
	11	52	108	57.8	120
	12	78	162	86.7	180
	13	104	216	115.6	240
	14	117	243	130	270
	15	130	270	144.4	300
	16	19.5	40.5	21.7	45
	17	39	81	43.4	90
	18	58.5	121.5	65	135
	19	78	162	86.7	180
	20	117	243	130	270

¹ MCS Index: The Modulation and Coding Scheme (MCS) index determines the number of spatial streams, the modulation, the coding rate, and data rate values.

² GI: A guard interval (GI) between symbols helps receivers overcome the effects of multipath delay spreads.

Item	Specification								
	21	156	324	173.3	360				
	22	175.5	364.5	195	405				
	23	195	405	216.7	450				
	24	26	54	28.9	60				
	25	52	108	57.8	120				
	26	78	162	86.7	180				
	27	104	216	115.6	240				
	28	156	324	173.3	360				
	29	208	432	231.1	480				
	30	234	486	260	540				
	31	260	540	288.9	600				
802.11ac data rates (5 GHz):									
MCS Index	Spatial streams	GI = 800 ns				GI = 400 ns			
		20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)	20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)
0	1	6.5	13.5	29.3	58.5	7.2	15	32.5	65
1	1	13	27	58.5	117	14.4	30	65	130
2	1	19.5	40.5	87.8	175.5	21.7	45	97.5	195
3	1	26	54	117	234	28.9	60	130	260
4	1	39	81	175.5	351	43.3	90	195	390
5	1	52	108	234	468	57.8	120	260	520
6	1	58.5	121.5	263.3	526.5	65	135	292.5	585
7	1	65	135	292.5	585	72.2	150	325	650
8	1	78	162	351	702	86.7	180	390	780
9	1	-	180	390	780	-	200	433.3	866.7
MCS Index	Spatial streams	GI = 800 ns				GI = 400 ns			

Item	Specification									
		20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)	20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)	
	0	2	13	27	58.5	117	14.4	30	65	130
	1	2	26	54	117	234	28.9	60	130	260
	2	2	39	81	175.5	351	43.3	90	195	390
	3	2	52	108	234	468	57.8	120	260	520
	4	2	78	162	351	702	86.7	180	390	780
	5	2	104	216	468	936	115.6	240	520	1040
	6	2	117	243	526.5	1053	130	270	585	1170
	7	2	130	270	585	1170	144.4	300	650	1300
	8	2	156	324	702	1404	173.3	360	780	1560
	9	2	-	360	780	1560	-	400	866.7	1733.4
	MCS Index	Spatial streams	GI = 800 ns				GI = 400 ns			
			20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)	20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)
	0	3	19.5	40.5	87.8	175.5	21.7	45	97.5	195
	1	3	39	81	175.5	351	43.3	90	195	390
	2	3	58.5	121.5	263.3	526.5	65	135	292.5	585
	3	3	78	162	351	702	86.7	180	390	780
	4	3	117	243	526.5	1053	130	270	585	1170
	5	3	156	324	702	1404	173.3	360	780	1560
	6	3	175.5	364.5	789.9	1579.5	195	405	877.5	1755
	7	3	195	405	877.5	1755	216.7	450	975	1950
	8	3	234	486	1053	2106	260	540	1170	2340
	9	3	260	540	1170	2340	288.9	600	1300	2600.1
	MCS Index	Spatial streams	GI = 800 ns				GI = 400 ns			

Item	Specification									
			20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)	20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)
	0	4	26	54	117	234	28.8	60	130	260
	1	4	52	108	234	468	57.8	120	260	520
	2	4	78	162	351	702	86.6	180	390	780
	3	4	104	216	468	936	115.6	240	520	1040
	4	4	156	324	702	1404	173.4	360	780	1560
	5	4	208	432	936	1872	231.2	480	1040	2080
	6	4	234	486	1053	2106	260	540	1170	2340
	7	4	260	540	1170	2340	288.8	600	1300	2600
	8	4	312	648	1404	2808	346.6	720	1560	3120
	9	4	-	720	1560	3120	-	800	1733	3466.8
802.11ax data rates (20 MHz on both 2.4- and 5-GHz bands and 40, 80, and 160 MHz only on 5-GHz band):										
	MCS Index	Spatial streams	GI = 1600 ns				GI = 800 ns			
			20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)	20-MHz rate (Mbps)	40-MHz rate (Mbps)	80-MHz rate (Mbps)	160-MHz rate (Mbps)
	0	1	4.3	8	17	34	4.3	9	18	36
	1	1	16	33	68	136	17	34	72	144
	2	1	24	49	102	204	26	52	108	216
	3	1	33	65	136	272	34	69	144	282
	4	1	49	98	204	408	52	103	216	432
	5	1	65	130	272	544	69	138	288	576
	6	1	73	146	306	613	77	155	324	649
	7	1	81	163	340	681	86	172	360	721
	8	1	98	195	408	817	103	207	432	865
	9	1	108	217	453	907	115	229	480	961

Item	Specification									
	10	1	122	244	510	1021	129	258	540	1081
	11	1	135	271	567	1134	143	287	600	1201
	0	2	8.6	16	34	68	8.6	18	36	72
	1	2	32	66	136	272	34	68	144	288
	2	2	48	98	204	408	52	104	216	432
	3	2	66	130	272	544	68	138	288	564
	4	2	98	196	408	816	104	206	432	864
	5	2	130	260	544	1088	138	276	576	1152
	6	2	146	292	612	1226	154	310	648	1298
	7	2	162	326	680	1362	172	344	720	1442
	8	2	196	390	816	1634	206	414	864	1730
	9	2	216	434	906	1814	230	458	960	1922
	10	2	244	488	1020	2042	258	516	1080	2162
	11	2	270	542	1134	2268	286	574	1200	2402
	0	3	12.9	24	51	102	12.9	27	54	108
	1	3	48	99	204	408	51	102	216	432
	2	3	72	147	306	612	78	156	324	648
	3	3	99	195	408	816	102	207	432	846
	4	3	147	294	612	1224	156	309	648	1296
	5	3	195	390	816	1632	207	414	864	1728
	6	3	219	438	918	1839	231	465	972	1947
	7	3	243	489	1020	2043	258	516	1080	2163
	8	3	294	585	1224	2451	309	621	1296	2595
	9	3	324	651	1359	2721	345	687	1440	2883
	10	3	366	732	1530	3063	387	774	1620	3243
	11	3	405	813	1701	3402	429	861	1800	3603
	0	4	17.2	32	68	136	17.2	36	72	144

Item	Specification										
	1	4	64	132	272	544	68	136	288	576	
	2	4	96	196	408	816	104	208	432	864	
	3	4	132	260	544	1088	136	276	576	1128	
	4	4	196	392	816	1632	208	412	864	1728	
	5	4	260	520	1088	2176	276	552	1152	2304	
	6	4	292	584	1224	2452	308	620	1296	2596	
	7	4	324	652	1360	2724	344	688	1440	2884	
	8	4	392	780	1632	3268	412	828	1728	3460	
	9	4	432	868	1812	3628	460	916	1920	3844	
	10	4	488	976	2040	4084	516	1032	2160	4324	
	11	4	540	1084	2268	4536	572	1148	2400	4804	
	MCS Index	Spatial streams	GI = 3200 ns								
	0	1	3.9	7.2	15.3	30.6					
	1	1	14.4	29.7	61.2	122.4					
	2	1	21.6	44.1	91.8	183.6					
	3	1	29.7	58.5	122.4	244.8					
	4	1	44.1	88.2	183.6	367.2					
	5	1	58.5	117.0	244.8	489.6					
	6	1	65.7	131.4	275.4	551.7					
	7	1	72.9	146.7	306.0	612.9					
	8	1	88.2	175.5	367.2	735.3					
	9	1	97.2	195.3	407.7	816.3					
	10	1	109.8	219.6	459.0	918.9					
	11	1	121.5	243.9	510.3	1020.6					
	0	2	7.7	14.4	30.6	61.2					
	1	2	28.8	59.4	122.4	244.8					
	2	2	43.2	88.2	183.6	367.2					

Item	Specification									
	3	2	59.4	117.0	244.8	489.6				
	4	2	88.2	176.4	367.2	734.4				
	5	2	117.0	234.0	489.6	979.2				
	6	2	131.4	262.8	550.8	1103.4				
	7	2	145.8	293.4	612.0	1225.8				
	8	2	176.4	351.0	734.4	1470.6				
	9	2	194.4	390.6	815.4	1632.6				
	10	2	219.6	439.2	918.0	1837.8				
	11	2	243.0	487.8	1020.6	2041.2				
	0	3	11.6	21.6	45.9	91.8				
	1	3	43.2	89.1	183.6	367.2				
	2	3	64.8	132.3	275.4	550.8				
	3	3	89.1	175.5	367.2	734.4				
	4	3	132.3	264.6	550.8	1101.6				
	5	3	175.5	351.0	734.4	1468.8				
	6	3	197.1	394.2	826.2	1655.1				
	7	3	218.7	440.1	918.0	1838.7				
	8	3	264.6	526.5	1101.6	2205.9				
	9	3	291.6	585.9	1223.1	2448.9				
	10	3	329.4	658.8	1377.0	2756.7				
	11	3	364.5	731.7	1530.9	3061.8				
	0	4	15.5	28.8	61.2	122.4				
	1	4	57.6	118.8	244.8	489.6				
	2	4	86.4	176.4	367.2	734.4				
	3	4	118.8	234.0	489.6	979.2				
	4	4	176.4	352.8	734.4	1468.8				
	5	4	234.0	468.0	979.2	1958.4				

Item		Specification							
		6	4	262.8	525.6	1101.6	2206.8		
		7	4	291.6	586.8	1224.0	2451.6		
		8	4	352.8	702.0	1468.8	2941.2		
		9	4	388.8	781.2	1630.8	3265.2		
		10	4	439.2	878.4	1836.0	3675.6		
		11	4	486.0	975.6	2041.2	4082.4		
Transmit power and receive sensitivity									
		5-GHz radio				2.4-GHz radio			
	Spatial streams	Total transmit power (dBm)		Receive sensitivity (dBm)		Total transmit power (dBm)		Receive sensitivity (dBm)	
802.11/11b									
1 Mbps	1	-		-		23		-98	
11 Mbps	1	-		-		23		-90	
802.11a/g									
6 Mbps	1	23		-96		23		-95	
24 Mbps	1	23		-87		23		-85	
54 Mbps	1	23		-76		23		-76	
802.11n HT20									
MCS0	1	23		-95		23		-94	
MCS4	1	23		-83		23		-83	
MCS7	1	23		-76		23		-76	
MCS8	2	23		-92		23		-91	
MCS12	2	23		-80		23		-80	
MCS15	2	23		-73		23		-73	
MCS16	3	23		-91		23		-90	
MCS20	3	23		-79		23		-79	
MCS23	3	23		-72		23		-72	
MCS24	4	23		-89		23		-88	

Item		Specification			
MCS28	4	23	-72	23	-73
MCS31	4	23	-70	23	-70
802.11n HT40					
MCS0	1	23	-93	-	-
MCS4	1	23	-81	-	-
MCS7	1	23	-73	-	-
MCS8	2	23	-89	-	-
MCS12	2	23	-78	-	-
MCS15	2	23	-70	-	-
MCS16	3	23	-88	-	-
MCS20	3	23	-76	-	-
MCS23	3	23	-69	-	-
MCS24	4	23	-87	-	-
MCS30	4	23	-70	-	-
MCS31	4	23	-68	-	-
802.11ac VHT20					
MCS0	1	23	-95	-	-
MCS4	1	23	-83	-	-
MCS7	1	23	-76	-	-
MCS8	1	22	-72	-	-
MCS9	1	22	NA	-	-
MCS0	2	23	-92	-	-
MCS4	2	23	-80	-	-
MCS7	2	23	-73	-	-
MCS8	2	22	-69	-	-
MCS9	2	22	NA	-	-
MCS0	3	23	-91	-	-

Item		Specification			
MCS4	3	23	-79	-	-
MCS7	3	23	-72	-	-
MCS8	3	22	-68	-	-
MCS9	3	22	-67	-	-
MCS0	4	23	-90	-	-
MCS4	4	23	-78	-	-
MCS7	4	23	-70	-	-
MCS8	4	22	-67	-	-
MCS9	4	22	-66	-	-
802.11ac VHT40					
MCS0	1	23	-89	-	-
MCS4	1	23	-78	-	-
MCS7	1	23	-71	-	-
MCS8	1	22	-67	-	-
MCS9	1	22	-65	-	-
MCS0	2	23	-86	-	-
MCS4	2	23	-75	-	-
MCS7	2	23	-68	-	-
MCS8	2	22	-64	-	-
MCS9	2	22	-62	-	-
MCS0	3	23	-85	-	-
MCS4	3	23	-73	-	-
MCS7	3	23	-66	-	-
MCS8	3	22	-63	-	-
MCS9	3	22	-61	-	-
MCS0	4	23	-84	-	-
MCS4	4	23	-72	-	-

Item		Specification			
MCS7	4	23	-65	-	-
MCS8	4	22	-61	-	-
MCS9	4	22	-59	-	-
802.11ac VHT80					
MCS0	1	23	-84	-	-
MCS4	1	23	-72	-	-
MCS7	1	23	-65	-	-
MCS8	1	22	-62	-	-
MCS9	1	22	-60	-	-
MCS0	2	23	-81	-	-
MCS4	2	23	-69	-	-
MCS7	2	23	-62	-	-
MCS8	2	22	-59	-	-
MCS9	2	22	-57	-	-
MCS0	3	23	-80	-	-
MCS4	3	23	-68	-	-
MCS7	3	23	-61	-	-
MCS8	3	22	-58	-	-
MCS9	3	22	-55	-	-
MCS0	4	23	-77	-	-
MCS4	4	23	-66	-	-
MCS7	4	23	-59	-	-
MCS8	4	22	-56	-	-
MCS9	4	22	-54	-	-
802.11ac VHT160					
MCS0	1	23	-84	-	-
MCS4	1	23	-72	-	-

Item		Specification			
MCS7	1	23	-64	-	-
MCS8	1	21	-60	-	-
MCS9	1	21	-59	-	-
MCS0	2	23	-85	-	-
MCS4	2	23	-70	-	-
MCS7	2	23	-62	-	-
MCS8	2	21	-58	-	-
MCS9	2	21	-57	-	-
MCS0	3	23	-85	-	-
MCS4	3	23	-68	-	-
MCS7	3	23	-60	-	-
MCS8	3	21	-56	-	-
MCS9	3	21	-55	-	-
MCS0	4	23	-85	-	-
MCS4	4	23	-66	-	-
MCS7	4	23	-58	-	-
MCS8	4	21	-54	-	-
MCS9	4	21	-53	-	-
802.11ax VHT20					
MCS0	1	23	-94	23	-93
MCS4	1	23	-81	23	-81
MCS7	1	23	-75	23	-74
MCS8	1	22	-71	21	-70
MCS9	1	22	-69	21	-69
MCS10	1	21	-65	20	-64
MCS11	1	21	-64	20	-62
MCS0	2	23	-91	23	-90

Item		Specification			
MCS4	2	23	-78	23	-78
MCS7	2	23	-72	23	-72
MCS8	2	22	-68	21	-68
MCS9	2	22	-66	21	-66
MCS10	2	21	-63	20	-62
MCS11	2	21	-61	20	-59
MCS0	3	23	-90	23	-88
MCS4	3	23	-77	23	-76
MCS7	3	23	-71	23	-70
MCS8	3	22	-67	21	-66
MCS9	3	22	-65	21	-65
MCS10	3	21	-62	20	-60
MCS11	3	21	-60	20	-58
MCS0	4	23	-87	23	-86
MCS4	4	23	-75	23	-75
MCS7	4	23	-69	23	-69
MCS8	4	22	-65	21	-65
MCS9	4	22	-63	21	-63
MCS10	4	21	-60	20	-59
MCS11	4	21	-59	20	-57
802.11ax VHT40					
MCS0	1	23	-92	23	-91
MCS4	1	23	-79	23	-79
MCS7	1	23	-72	23	-72
MCS8	1	22	-68	21	-68
MCS9	1	22	-66	21	-66
MCS10	1	21	-63	20	-62

Item		Specification			
MCS11	1	21	-60	20	-60
MCS0	2	23	-89	23	-87
MCS4	2	23	-76	23	-76
MCS7	2	23	-69	23	-69
MCS8	2	22	-65	21	-65
MCS9	2	22	-63	21	-63
MCS10	2	21	-60	20	-59
MCS11	2	21	-57	20	-57
MCS0	3	23	-88	23	-85
MCS4	3	23	-75	23	-74
MCS7	3	23	-68	23	-67
MCS8	3	22	-64	21	-63
MCS9	3	22	-62	21	-61
MCS10	3	21	-59	20	-58
MCS11	3	21	-56	20	-55
MCS0	4	23	-86	23	-83
MCS4	4	23	-73	23	-73
MCS7	4	23	-66	23	-66
MCS8	4	22	-62	21	-62
MCS9	4	22	-60	21	-60
MCS10	4	21	-57	20	-57
MCS11	4	21	-54	20	-54
802.11ax VHT80					
MCS0	1	23	-87	-	-
MCS4	1	23	-76	-	-
MCS7	1	23	-69	-	-
MCS8	1	22	-66	-	-

Item		Specification			
MCS9	1	22	-64	-	-
MCS10	1	21	-60	-	-
MCS11	1	21	-58	-	-
MCS0	2	23	-84	-	-
MCS4	2	23	-73	-	-
MCS7	2	23	-66	-	-
MCS8	2	22	-63	-	-
MCS9	2	22	-61	-	-
MCS10	2	21	-57	-	-
MCS11	2	21	-55	-	-
MCS0	3	23	-83	-	-
MCS4	3	23	-72	-	-
MCS7	3	23	-65	-	-
MCS8	3	22	-62	-	-
MCS9	3	22	-60	-	-
MCS10	3	21	-56	-	-
MCS11	3	21	-54	-	-
MCS0	4	23	-81	-	-
MCS4	4	23	-70	-	-
MCS7	4	23	-63	-	-
MCS8	4	22	-60	-	-
MCS9	4	22	-57	-	-
MCS10	4	21	-53	-	-
MCS11	4	21	-52	-	-
802.11ax VHT160					
MCS0	1	23	-84	-	-
MCS4	1	23	-73	-	-

Item		Specification			
MCS7	1	23	-66	-	-
MCS8	1	21	-63	-	-
MCS9	1	21	-61	-	-
MCS10	1	20	-57	-	-
MCS11	1	20	-55	-	-
MCS0	2	23	-81	-	-
MCS4	2	23	-70	-	-
MCS7	2	23	-63	-	-
MCS8	2	21	-60	-	-
MCS9	2	21	-58	-	-
MCS10	2	20	-54	-	-
MCS11	2	20	-52	-	-
MCS0	3	23	-80	-	-
MCS4	3	23	-69	-	-
MCS7	3	23	-61	-	-
MCS8	3	21	-59	-	-
MCS9	3	21	-57	-	-
MCS10	3	20	-53	-	-
MCS11	3	20	-51	-	-
MCS0	4	23	-78	-	-
MCS4	4	23	-67	-	-
MCS7	4	23	-60	-	-
MCS8	4	21	-57	-	-
MCS9	4	21	-55	-	-
MCS10	4	20	-51	-	-
MCS11	4	20	-49	-	-

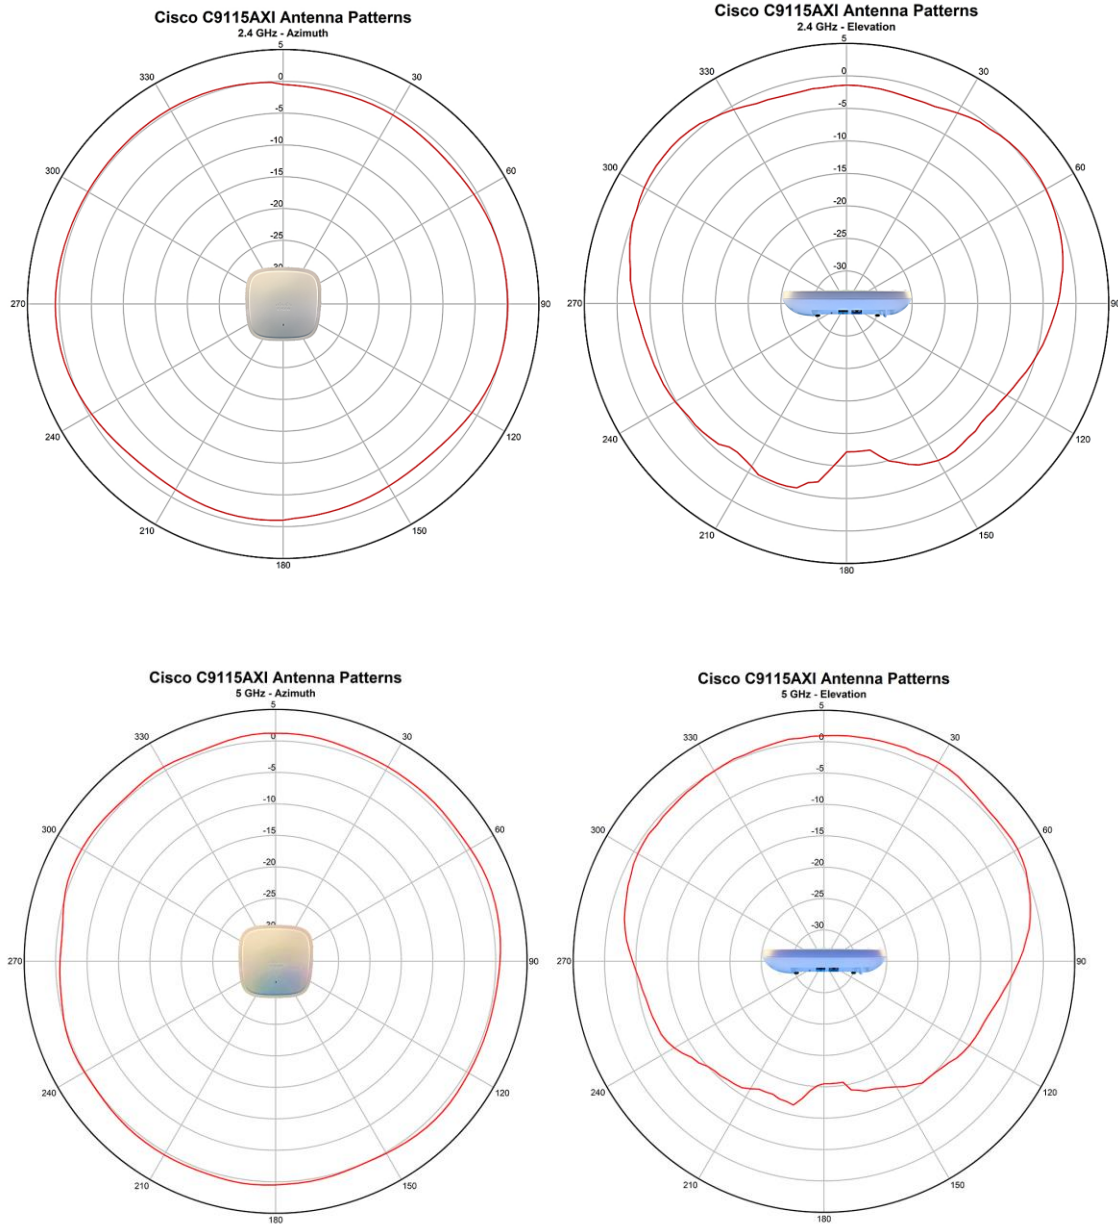


Figure 2.
Antenna radiation pattern

Licensing and software packaging

The Cisco Catalyst 9100 Access Points require mandatory Smart Licensing. This provides ease of use for Cisco DNA license management, consumption, and tracking. The 9100 access points use packaging that includes vastly simplified base network packages (Network Essentials and Network Advantage) and term-based software packages (Cisco DNA Essentials, Cisco DNA Advantage) as add-ons. The Cisco DNA packages, in addition to on-box capabilities, also unlock additional functionality in Cisco DNA Center, enabling controller-based software-defined automation and assurance in your network.

The Cisco Catalyst 9100 Access Points can support three types of Cisco DNA licenses: Cisco DNA Essentials, Cisco DNA Advantage, and Cisco DNA Premier. The Cisco DNA licenses provide Cisco innovations on the access point. The Cisco DNA license also includes the Network Essentials and Network Advantage licensing options, which cover wireless fundamentals such as 802.1X authentication, Quality of Service (QoS), and Plug and Play (PnP); telemetry and visibility; and Single Sign-On (SSO), as well as security controls. These Network Essentials and Network Advantage components are perpetual and valid for the life of the access point. Cisco DNA subscription licenses have to be purchased for a 3-, 5-, or 7-year subscription term. However, upon expiration of the Cisco DNA license, Cisco DNA features will expire, whereas the Network Essentials and Network Advantage features will remain.

Note that it is not required to deploy Cisco DNA Center just to use one of the above packages. Refer to <https://www.cisco.com/c/dam/en/us/products/collateral/software/one-wireless-subscription/q-and-a-c67-739601.pdf> for additional details about the Essentials and Advantage packages.

For information about feature support, please refer to the Cisco Catalyst 9100 Release Notes.

Managing licenses with Smart Accounts

Creating Smart Accounts by using the Cisco Smart Software Manager (SSM) enables you to order devices and licensing packages and also manage your software licenses from a centralized website. You can set up the Smart Account to receive daily email alerts and to be notified of expiring add-on licenses that you want to renew. A Smart Account is mandatory for Cisco Catalyst 9100 Access Points. For more information on Smart Accounts, refer to <https://www.cisco.com/go/smartaccounts>.

In order to connect any access points to the **controller**, Cisco DNA software subscriptions are required. To be entitled to connect to a Cisco Catalyst 9800 Series Wireless Controller, the access point requires a Cisco DNA subscription license.

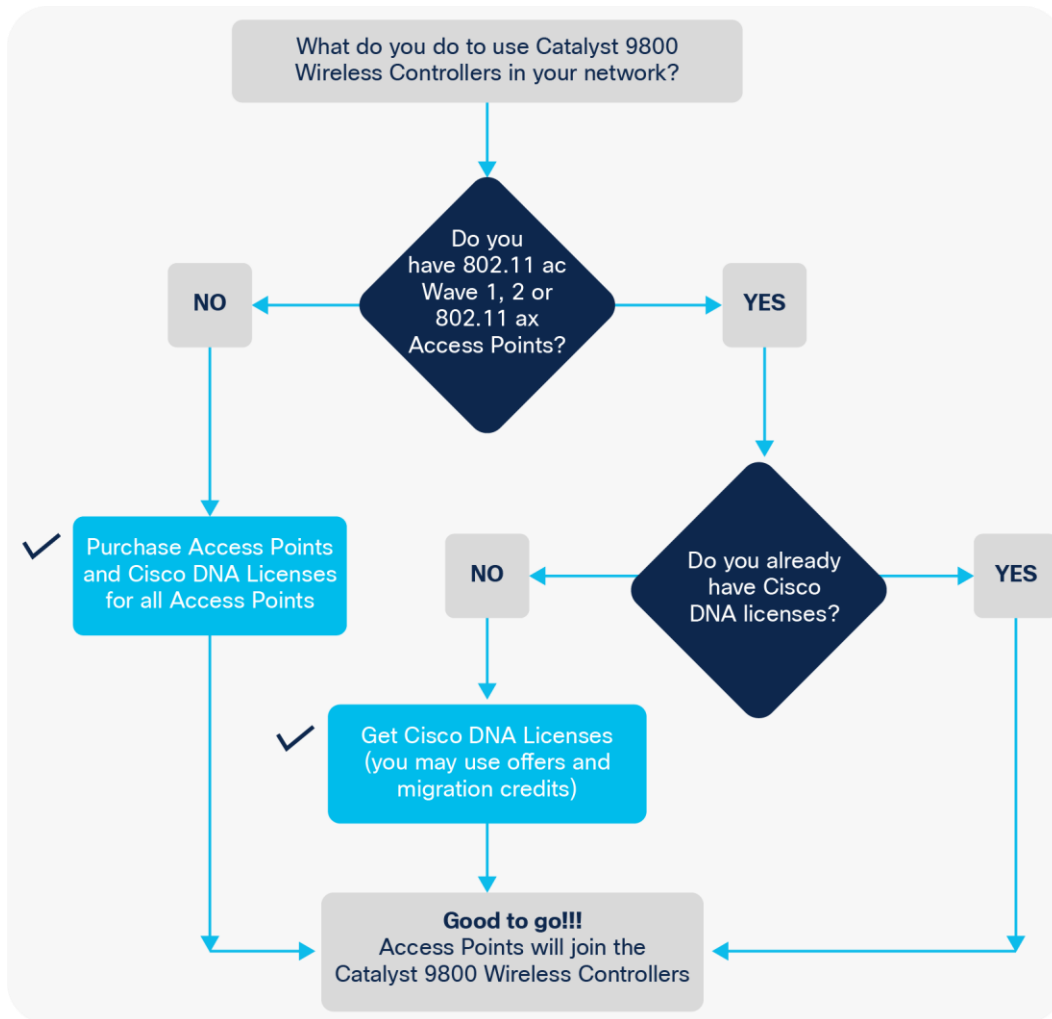


Figure 3. Determining license requirements for access points connecting to Cisco Catalyst 9800 Series Wireless Controllers

Access points connecting to a Cisco Catalyst 9800 Series controller have new and simplified software subscription packages.

They can support 3 tiers of Cisco DNA software: Cisco DNA Essentials, Cisco DNA Advantage and Cisco DNA Premier.

Cisco DNA software subscriptions provide Cisco innovations on the access point. They also include perpetual Network Essentials and Network Advantage licensing options, which cover wireless fundamentals such as 802.1X authentication, Quality of Service (QoS), and Plug and Play (PnP); telemetry and visibility; and Single Sign-On (SSO), as well as security controls.

Cisco DNA subscription software has to be purchased for a 3-, 5-, or 7-year subscription term. If not renewed by the end of the term, Cisco DNA features will expire, whereas Network Essentials and Network Advantage features will remain.

For the full feature list of Cisco DNA Software, including the perpetual Network Essentials and Network Advantage, please see the feature matrix:

https://www.cisco.com/c/m/en_us/products/software/dna-subscription-wireless/en-sw-sub-matrix-wireless.html?oid=porew018984

Two modes of licensing are available:

- Smart Licensing (SL) simplifies and adds flexibility to licensing. It is:
 - Simple: Procure, deploy, and manage licenses easily. Devices self-register, removing the need for Product Activation Keys (PAKs).
 - Flexible: Pool license entitlements in a single account. Move licenses freely through the network, wherever you need them.
 - Smart: Manage your license deployments with real-time visibility into ownership and consumption.
- Specific License Reservation (SLR) is a feature used in highly secure networks. It provides a method for customers to deploy a software license on a device (product instance) without communicating usage information to Cisco. There is no communication with Cisco or a satellite. The licenses are reserved for every controller. It is node-based licensing.

Four levels of license are supported on the **Cisco Catalyst 9800 Series Wireless Controllers**. The controllers can be configured to function at any one of the four levels:

- Cisco DNA Essentials: At this level the Cisco DNA Essentials feature set will be supported.
- Cisco DNA Advantage: At this level the Cisco DNA Advantage feature set will be supported.
- NE: At this level the Network Essentials feature set will be supported.
- NA: At this level the Network Advantage feature set will be supported.

Cisco DNA Premier is a bundle with ISE licenses and Cisco DNA Spaces Extend. It is inclusive of Cisco DNA Advantage, so at this level the Cisco DNA Advantage feature set will be supported. For customers who purchase Cisco DNA Essentials, Network Essentials will be supported and will continue to function even after term expiration. And for customers who purchase Cisco DNA Advantage or Cisco DNA Premier, Network Advantage will be supported and will continue to function even after term expiration.

Initial bootup of the controller will be at the Cisco DNA Advantage level.

For questions, contact the Cisco Catalyst 9800 Series Wireless Controllers Licensing mailer group at ask-catalyst9800licensing

Warranty information

The Cisco Catalyst 9115AX Series Access Points come with a limited lifetime warranty that provides full warranty coverage of the hardware for as long as the original end user continues to own or use the product. The warranty includes 10-day advance hardware replacement and ensures that software media are defect-free for 90 days. For more details, visit <https://www.cisco.com/go/warranty>.

Cisco environmental sustainability

Information about Cisco's environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the "Environment Sustainability" section of Cisco's [Corporate Social Responsibility](#) (CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the "Environment Sustainability" section of the CSR Report) are provided in the Table 3.

Table 3. Links to sustainability information

Sustainability topic	Reference
Information on product material content laws and regulations	Materials
Information on electronic waste laws and regulations, including products, batteries, and packaging	WEEE compliance
Sustainability inquiries	Contact: csr_inquiries@cisco.com

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

Cisco Services

With Cisco Services, you can achieve infrastructure excellence faster with less risk. From initial WLAN readiness assessment to implementation, full solution support and in-depth training, our services for the Cisco Catalyst 9115AX Series Access Points provide expert guidance to help you successfully plan, deploy, manage, and support your new access points. With unmatched networking expertise, best practices, and innovative tools, Cisco Services can help you reduce overall upgrade, refresh, and migration costs as you introduce new hardware, software, and protocols into the network. With a comprehensive lifecycle of services, Cisco experts will help you minimize disruption and improve operational efficiency to extract maximum value from your Cisco DNA ready infrastructure.

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital® makes it easier to get the right technology to achieve your objectives, enable business transformation, and stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more.](#)

Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)